


AVK SERIES 816 CONCENTRIC BUTTERFLY VALVES



EXPECT SOLUTIONS,
NOT JUST PRODUCTS

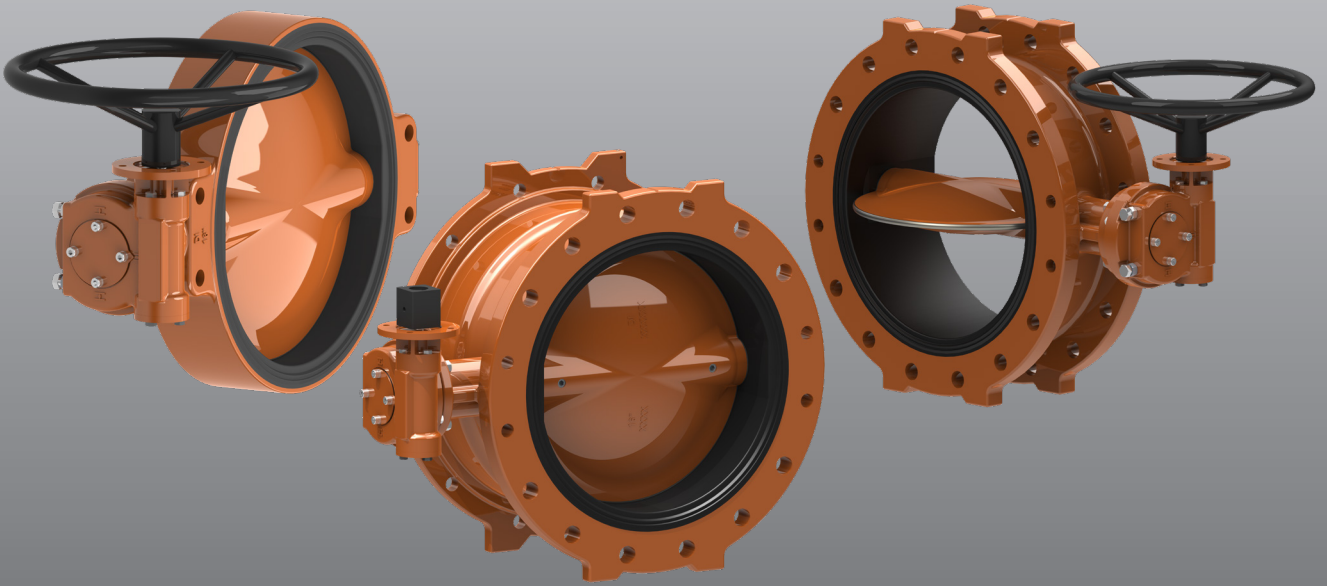

AVK SERIES 816

CONCENTRIC BUTTERFLY VALVES


FEATURES

- Size range – 3” – 24”
- Available in Flanged, Mechanical Joint, Flanged by Mechanical Joint, and Wafer configurations
- Coatings comply with AWWA C550
- NSF61 and NSF372 certified
- Ductile Iron construction including a Ductile Iron disc
- Meets or exceeds AWWA C504
- PTFE Bearings; Low friction, long life, no lubrication
- EPDM rubber liner for long life in Chloramines and other disinfectants
- Worm gear actuator
- Actuators can withstand 450 ft-lb input torque
- 1 year warranty



EXPECT INNOVATION BUTTERFLY VALVES

ABOVE GROUND ACTUATION

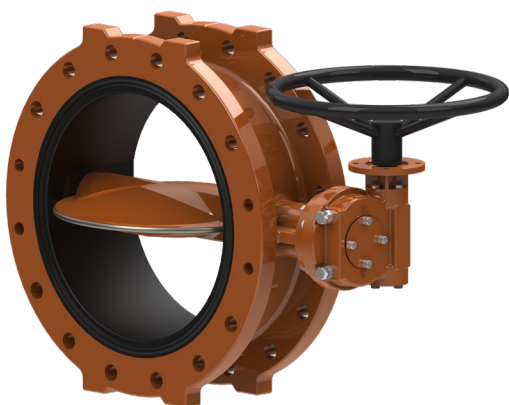

BELOW GROUND ACTUATION



**SERIES 816 CONCENTRIC BUTTERFLY VALVE
CLASS 150B AND 250B AVAILABLE**

- Low head loss concentric design
- Vulcanized seat wraps onto flange faces to provide gasket
- Mechanical Joint will accept DR9 HDPE pipe with no need to bevel
- No seat adjustment necessary
- Ni-Cu welded seats tested to 100,000 cycles
- Hex stem to disc driving system
- Lever actuators available 3" to 8" class 150B on Flanged and Wafer configurations

American AVK Company Locations

American AVK Company

2155 Meridian Blvd.
Minden, NV
89423
USA

Tel.: 775-552-1400
Fax.: 775-783-1031
sales@avkus.com
www.americanavk.com

F99011/03-11-2019
Copyright©AVK Group A/S 2019

