


AVK FIRE PROTECTION PRODUCT LINE



EXPECT  
RELIABILITY

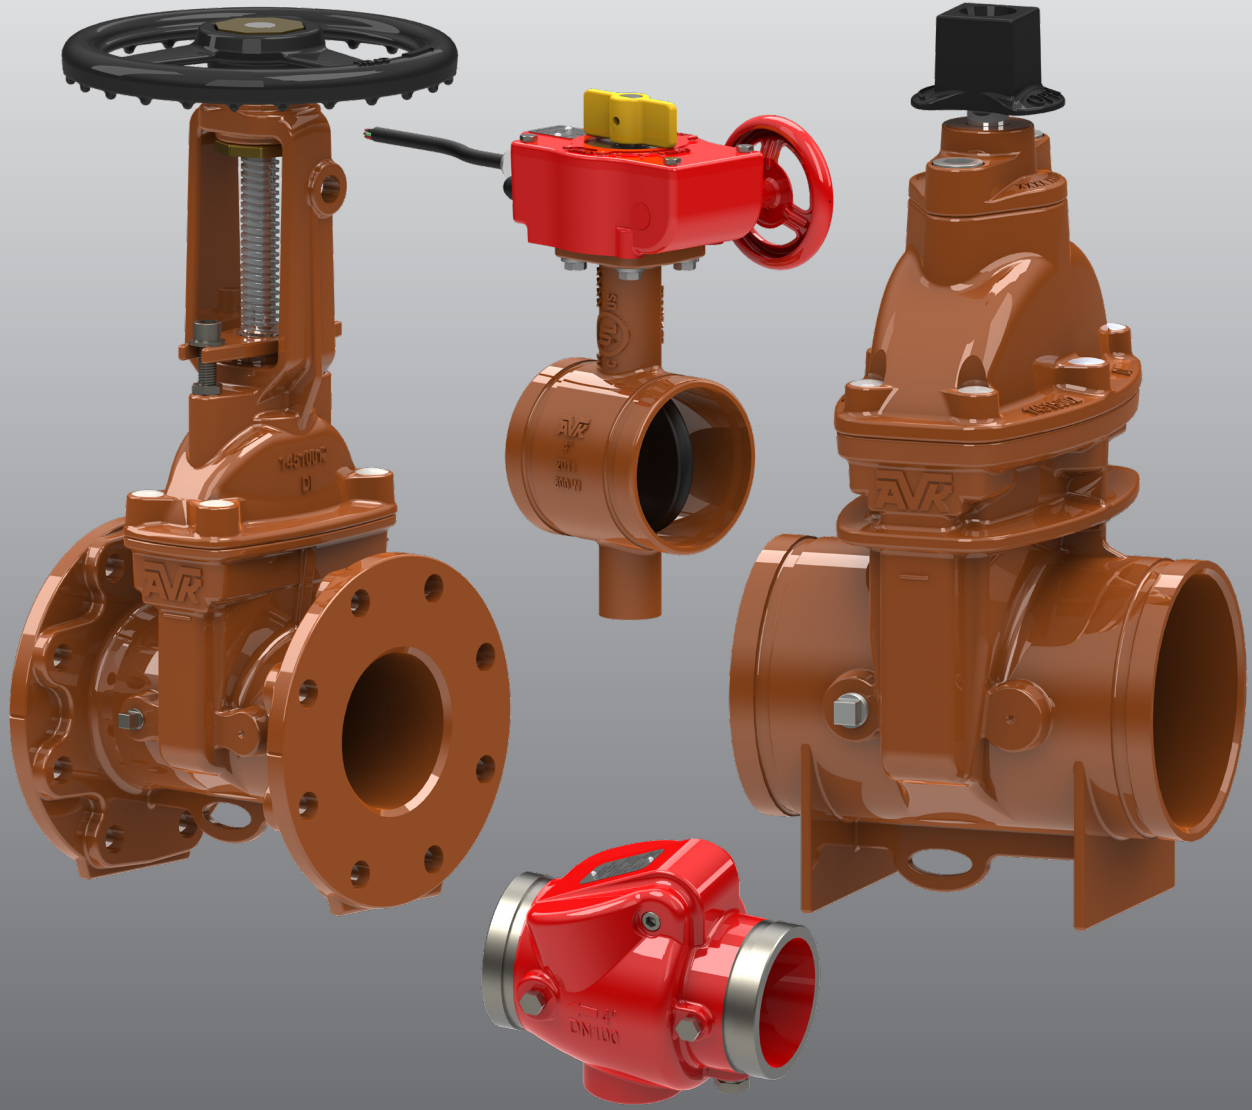


# AVK SERIES 145 VALVES RESILIENT WEDGE VALVE DESIGNED FOR VALUE

## AVK STANDARD FEATURES

- Series 145 Gate Valves are made of ductile iron with a 250 PSI rated working pressure, in sizes 2½"-8"
- Comes standard with 1 boss hole, drilled, tapped and plugged
- Available in both NRS and OS&Y configurations
- ASTM A276 stainless steel stems
- Cold-rolled threading process eliminates bent or broken stems
- Electrostatically applied, fusion bonded epoxy resin provides extended corrosion resistance
- Bonnet bolts are fully isolated against corrosion to eliminate bonnet bolt failures
- All AVK Series 145 Gate Valves are covered by a 2 year warranty
- UL/ULC listed and FM approved
- Made in the USA

## FULLY ENCAPSULATED EPDM WEDGE DUCTILE IRON CORE


- Patent pending "Slim Wedge" design with integral wedge shoes reduces operating torque
- Fully encapsulated EPDM wedge prevents deterioration from disinfectants
- Fixed wedge-nut provides higher torque resistance and prevents rubber wear and leakage

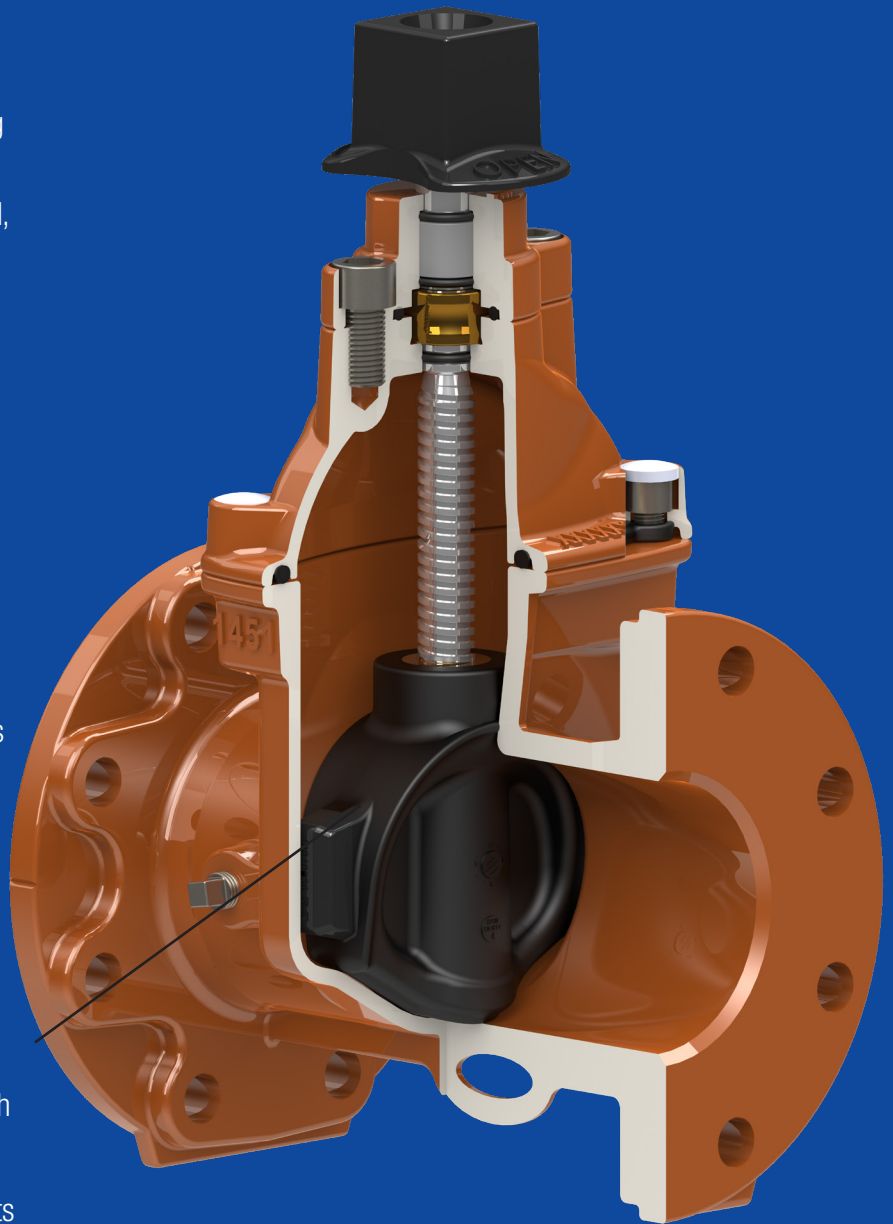

# WHEN EVERY SECOND COUNTS COUNT ON AVK

## AVK SERIES 34 WALL POST INDICATORS

- Available in three fixed lengths
- Handwheel can be locked to prevent tampering
- Pre-cast, threaded boss is provided for supervisory switch mounting
- 1 year limited warranty
- UL/ULC listed and FM approved

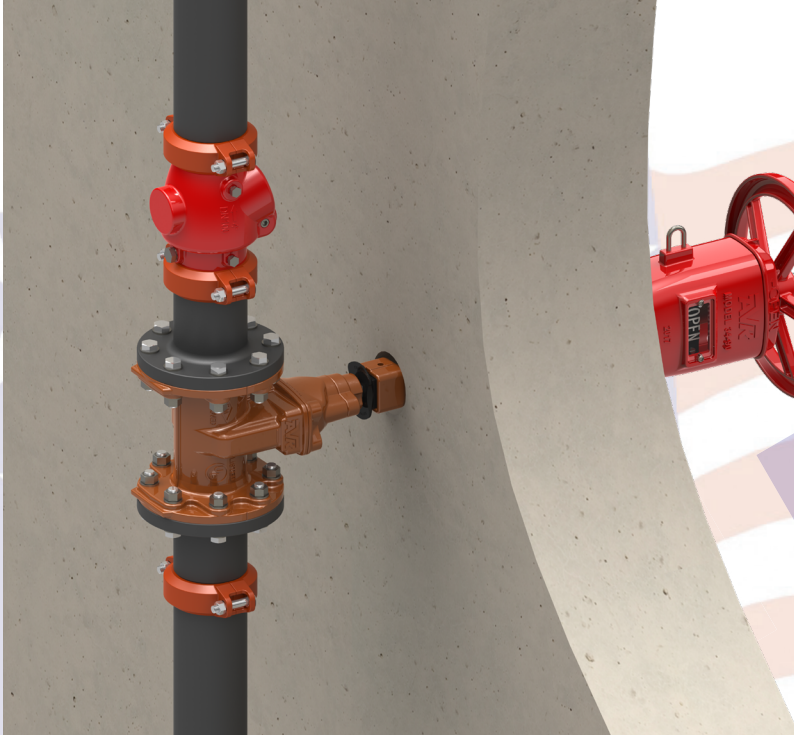

## AVK FIRE PROTECTION SERIES 45 VALVES

- Full wall, ductile iron bodies with stainless steel stems
- Available in Flange x Flange, Mechanical Joint x Flange, and Mechanical Joint x Mechanical Joint end configurations, with post indicator plates for AVK Series 34 Telescoping Indicator Posts
- Grooved x Grooved and Grooved x Flanged end configurations in both NRS and OS&Y models
- 250 PSI rated working pressure
- 2 year limited warranty
- UL/ULC listed and FM approved




# SERIES 5190

# CHECK VALVES

UL/ULC LISTED  
FM APPROVED

## SERIES 5190 GROOVED END SWING CHECK VALVES

- IPS grooved end swing check valves in sizes 2½"-8"
- Standard IPS grooved ends to AWWA C606
- Spring assisted clapper to minimize slam closures
- Low pressure drops
- EPDM leak-tight sealing
- All internal, metal parts are stainless steel, providing superior corrosion resistance
- Can be installed in either horizontal or vertical line with upward flow
- 1 year limited warranty
- UL/ULC listed and FM approved

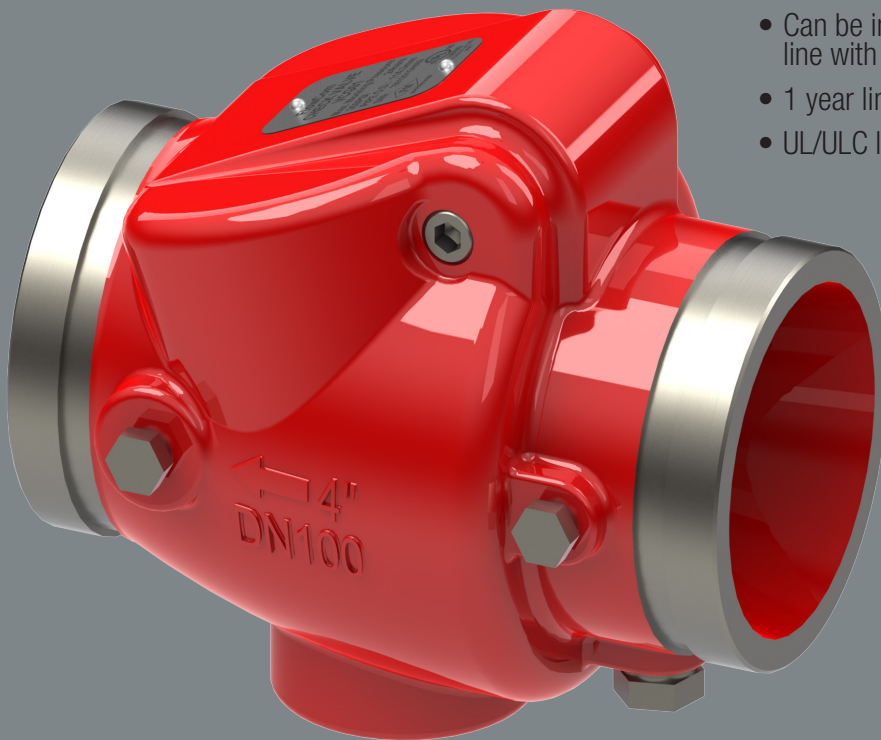


# SERIES 815 - UL/FM BUTTERFLY VALVES

## GROOVED ENDS IPS

### AVK SERIES 815 GROOVED END BUTTERFLY VALVES

- Grooved ends to AWWA C606 standard in sizes 2½" through 8"
- 300 PSI rated working pressure
- Fully encapsulated EPDM disc
- Series 815 valves come with integral gearbox including supervisory switches
- Electrostatically applied, fusion bonded epoxy resin provides extended corrosion resistance
- UL/ULC listed and FM approved
- 1 year limited warranty
- Made in the USA

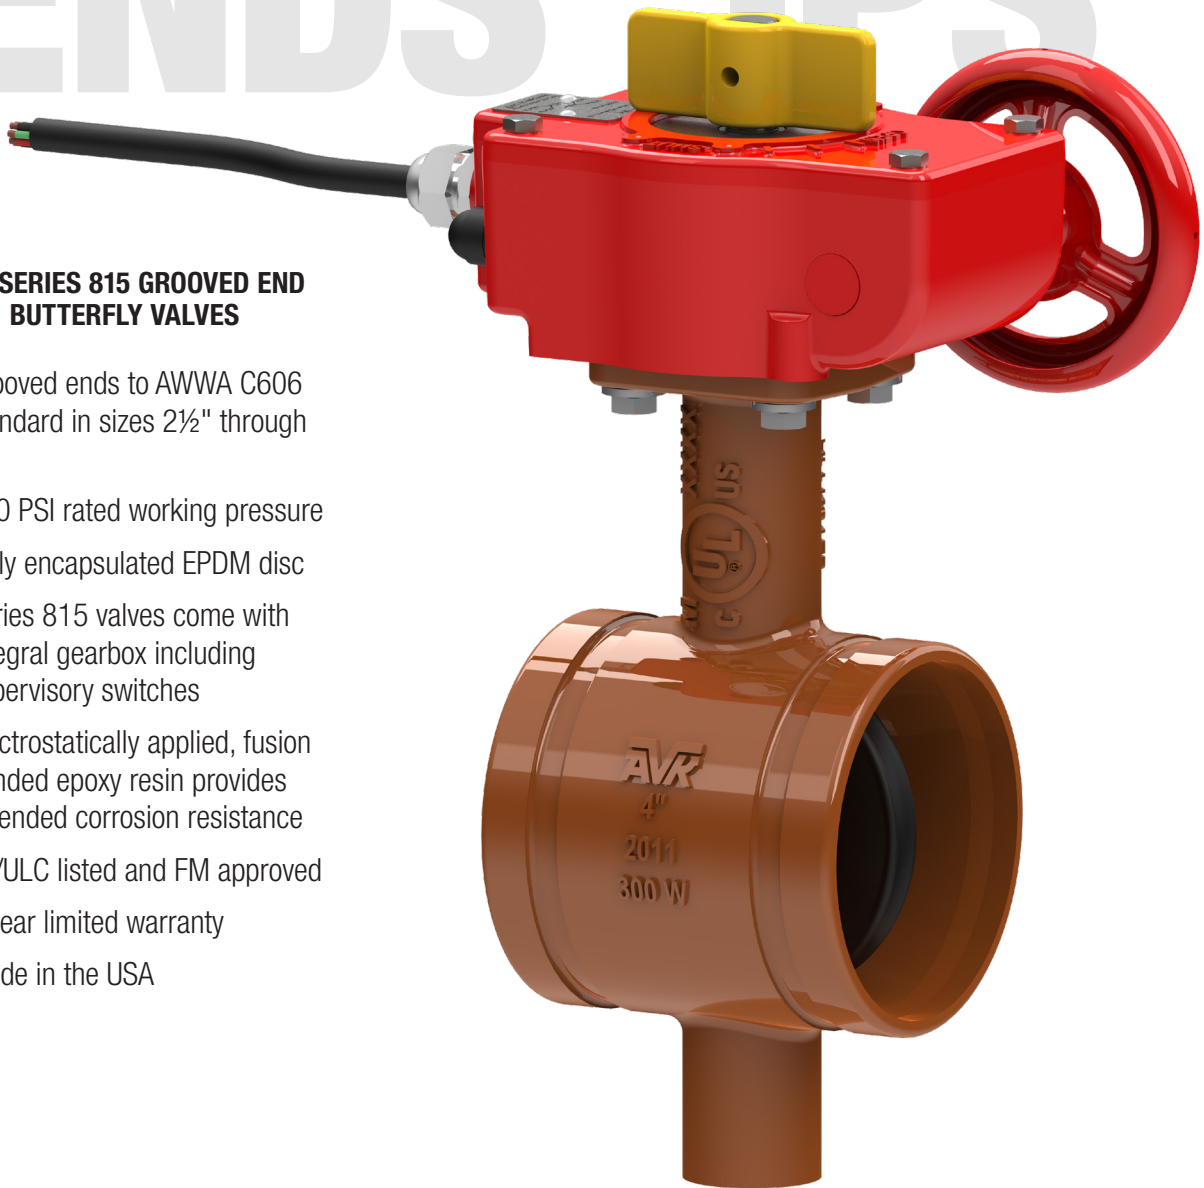

American AVK Company Locations

**American AVK Company**

2155 Meridian Blvd.  
Minden, NV  
89423  
USA

Tel.: 775-552-1400  
Fax.: 775-552-1031  
sales@avkus.com  
www.americanavk.com

F99007/08-26-2019  
Copyright©AVK Group A/S 2019

