


AVK FIRE PROTECTION PRODUCT LINE

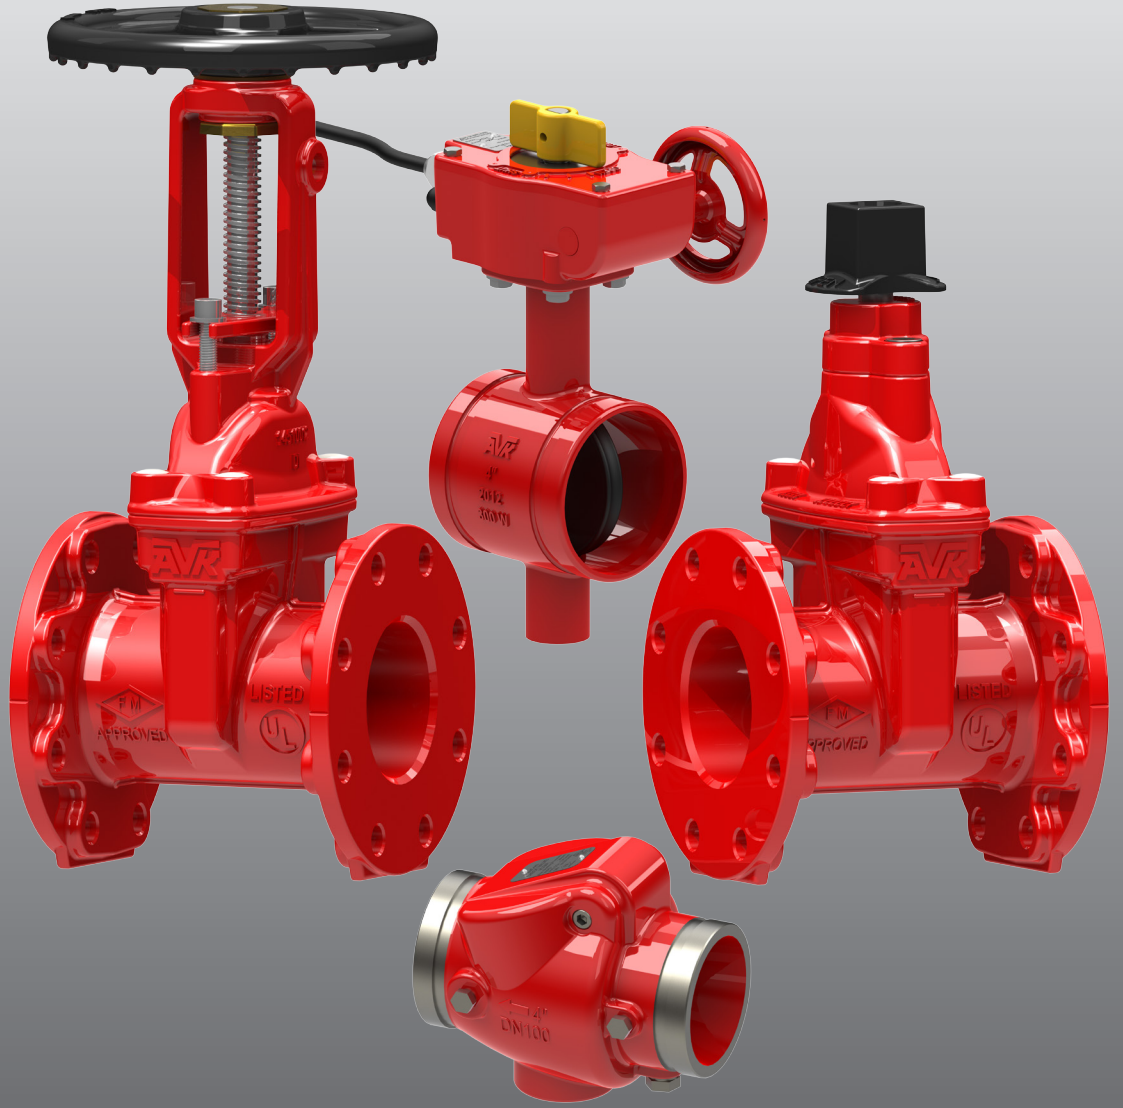

EXPECT
RELIABILITY

Expect... **AVK**


AVK SERIES 145 VALVES RESILIENT WEDGE VALVE DESIGNED FOR VALUE

AVK STANDARD FEATURES


- Series 145 Gate Valves are made of ductile iron with a 250 PSI rated working pressure, in sizes 2½"-8"
- Available in both NRS and OS&Y configurations
- ASTM A276 stainless steel stems
- Cold-rolled threading process eliminates bent or broken stems
- Electrostatically applied, fusion bonded epoxy resin provides extended corrosion resistance
- Bonnet bolts are fully isolated against corrosion to eliminate bonnet bolt failures
- All AVK Series 145 Gate Valves are covered by a 2 year warranty
- UL/ULC listed and FM approved
- Made in the USA

FULLY ENCAPSULATED EPDM WEDGE DUCTILE IRON CORE

- Patent pending "Slim Wedge" design with integral wedge shoes reduces operating torque
- Fully encapsulated EPDM wedge prevents deterioration from disinfectants
- Fixed wedge-nut provides higher torque resistance and prevents rubber wear and leakage

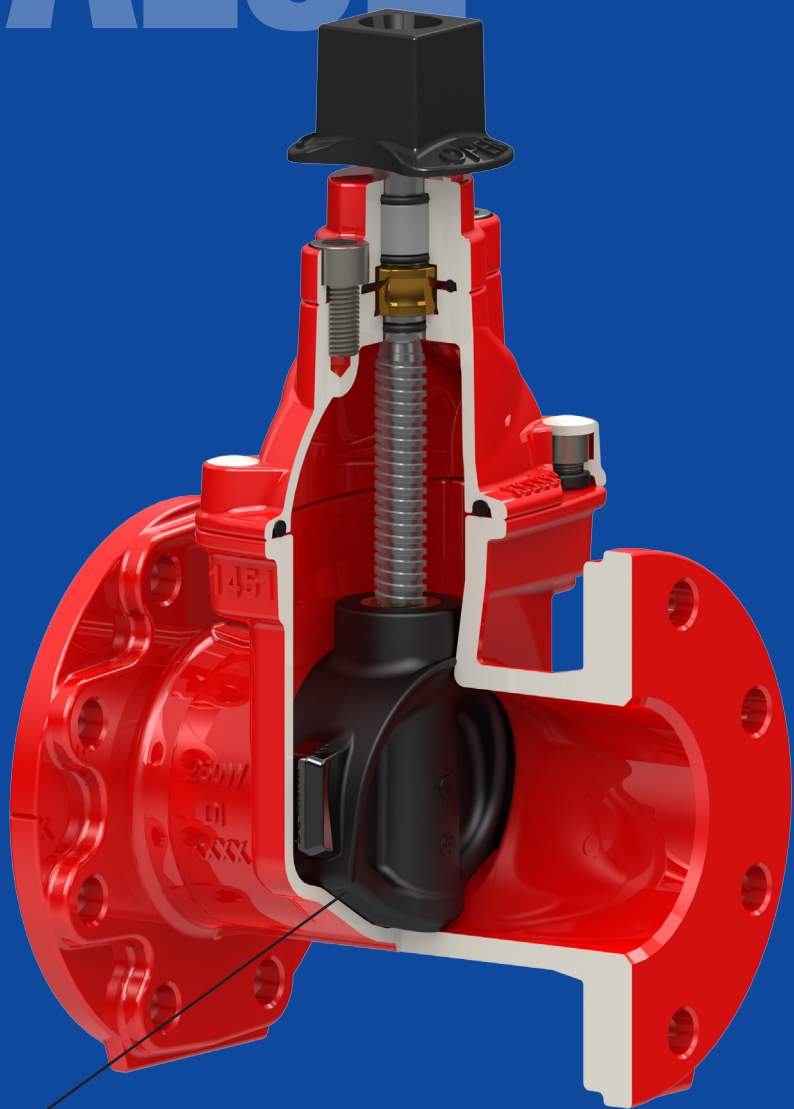


WHEN EVERY SECOND COUNTS COUNT ON AVK

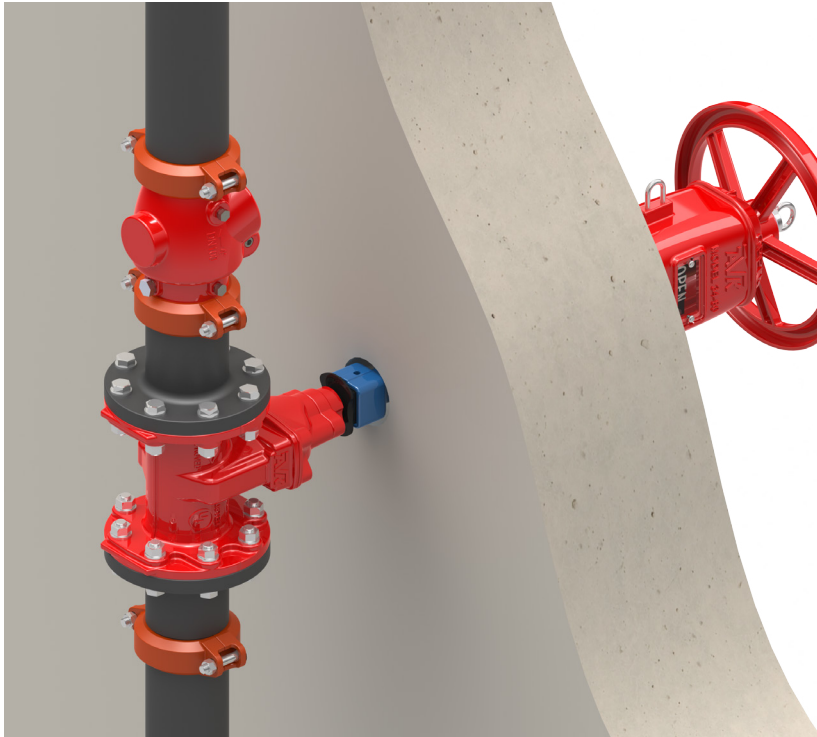

AVK SERIES 34 WALL POST INDICATORS

- Available in three fixed lengths
- Handwheel can be locked to prevent tampering
- Pre-cast, threaded boss is provided for supervisory switch mounting
- 1 year limited warranty
- UL/ULC listed and FM approved

COMING SOON

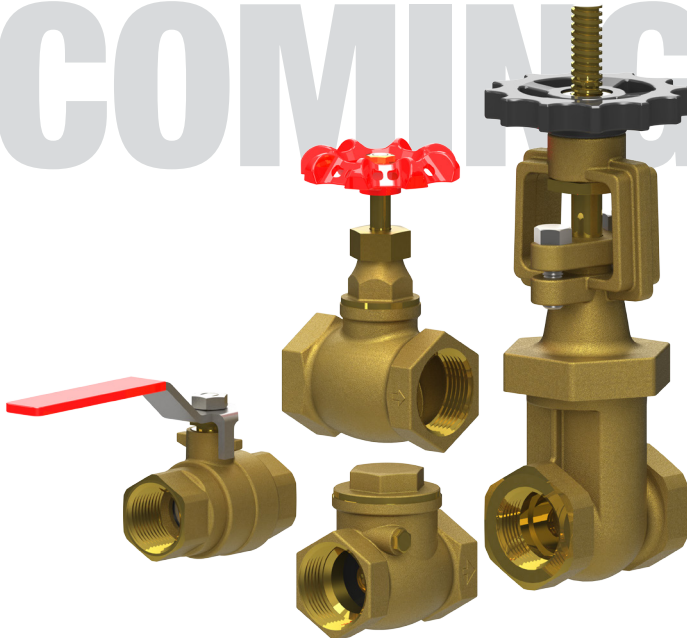

AVK FIRE PROTECTION TRIM VALVES

- Bronze Gate, Ball, Check, and Globe valves available in sizes ½"-2"
- Class 125 NPT threads
- 175 PSI rated working pressure
- 1 year limited warranty
- UL/ULC listed and FM approved *


* Not all valve types

SERIES 5190 CHECK VALVES

UL/ULC LISTED FM APPROVED

SERIES 5190 GROOVED END SWING CHECK VALVES

- IPS grooved end swing check valves in sizes 2½"-8"
- Standard IPS grooved ends to AWWA C606
- Spring assisted clapper to minimize slam closures
- Low pressure drops
- EPDM leak-tight sealing
- All internal, metal parts are stainless steel, providing superior corrosion resistance
- Can be installed in either horizontal or vertical line with upward flow
- 1 year limited warranty
- UL/ULC listed and FM approved

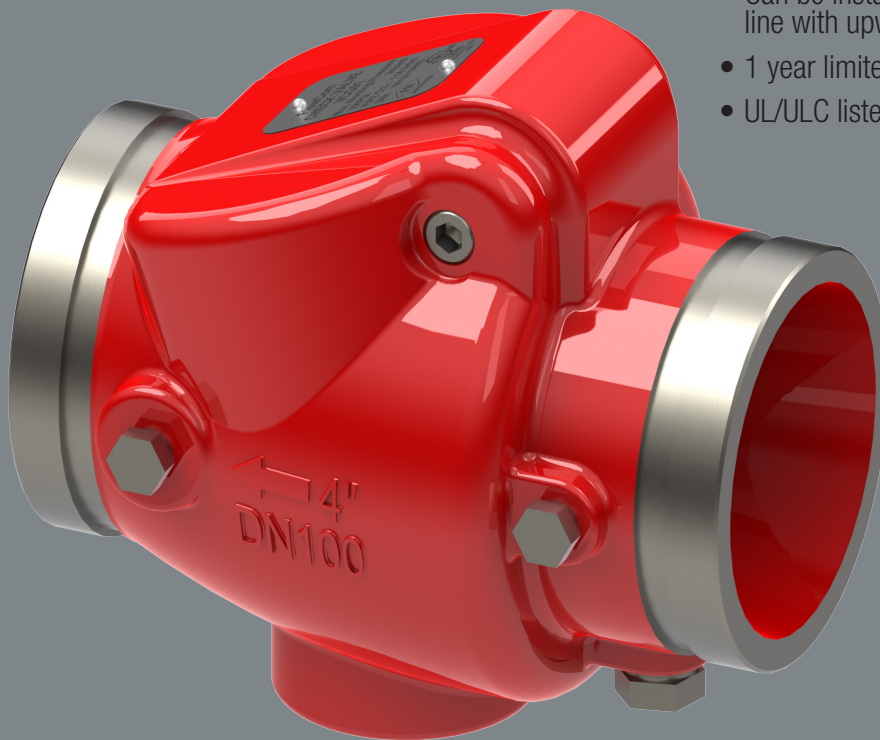

SERIES 815 - UL/FM BUTTERFLY VALVES

AVK SERIES 815 GROOVED END BUTTERFLY VALVES

- Grooved ends to AWWA C606 standard in sizes 2½" through 8"
- 300 PSI rated working pressure
- Fully encapsulated EPDM disc
- Series 815 valves come with integral gearbox including supervisory switches
- Electrostatically applied, fusion bonded epoxy resin provides extended corrosion resistance
- UL/ULC listed and FM approved
- 1 year limited warranty
- Made in the USA



COMING SOON



American AVK Company Locations

American AVK Company

2155 Meridian Blvd.
Minden, NV
89423
USA

Tel.: 775-552-1400
Fax.: 775-552-1031
sales@avkus.com
www.americanavk.com

GenFireProTFB/03-01-2016
Copyright©AVK Group A/S 2016

Expect... 